


Gecko with Latches Connectors

Female PC Tail

- ❖ 4-finger Beryllium Copper contact.
- ❖ Positive keyway polarisation features.
- ❖ 2A current capacity, resists high vibration and shock.
- ❖ Withstands extremes of temperature: -65°C to +150°C.

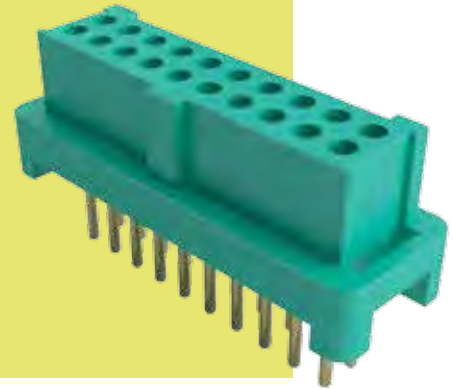

3mm PC TAIL	4.5mm PC TAIL										
<p style="text-align: center;">Recommended PC Board Pattern</p>	<p style="text-align: center;">Recommended PC Board Pattern</p>										
<table border="1" style="margin: auto; border-collapse: collapse;"> <thead> <tr style="background-color: #e6f2ff;"> <th colspan="2">CALCULATION</th> </tr> </thead> <tbody> <tr> <td style="padding: 2px;">A</td> <td style="padding: 2px;">$B + 3.8$</td> </tr> <tr> <td style="padding: 2px;">B</td> <td style="padding: 2px;">$0.625 \times (\text{Total No. of contacts} - 2)$</td> </tr> <tr> <td style="padding: 2px;">C</td> <td style="padding: 2px;">$B + 1.8$</td> </tr> </tbody> </table>		CALCULATION		A	$B + 3.8$	B	$0.625 \times (\text{Total No. of contacts} - 2)$	C	$B + 1.8$		
CALCULATION											
A	$B + 3.8$										
B	$0.625 \times (\text{Total No. of contacts} - 2)$										
C	$B + 1.8$										
HOW TO ORDER											
<p style="font-size: 1.2em; font-weight: bold; letter-spacing: 0.5em;">G125 - F VX XX 05 L0 X</p>											
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr style="background-color: #e6f2ff;"> <th colspan="2">SERIES CODE</th> </tr> </thead> <tbody> <tr> <td style="width: 50%;"></td> <td style="width: 50%;"></td> </tr> </tbody> </table>	SERIES CODE				<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr style="background-color: #e6f2ff;"> <th colspan="2">PACKAGING</th> </tr> </thead> <tbody> <tr> <td style="width: 50%;">R</td> <td style="width: 50%;">Tape & Reeled</td> </tr> <tr> <td>P</td> <td>Loose</td> </tr> </tbody> </table>	PACKAGING		R	Tape & Reeled	P	Loose
SERIES CODE											
PACKAGING											
R	Tape & Reeled										
P	Loose										
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr style="background-color: #e6f2ff;"> <th colspan="2">TYPE</th> </tr> </thead> <tbody> <tr> <td style="width: 50%;">V1</td> <td style="width: 50%;">3mm PC Tail</td> </tr> <tr> <td>V2</td> <td>4.5mm PC Tail</td> </tr> </tbody> </table>	TYPE		V1	3mm PC Tail	V2	4.5mm PC Tail	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr style="background-color: #e6f2ff;"> <th colspan="2">FINISH</th> </tr> </thead> <tbody> <tr> <td style="width: 50%;">05</td> <td style="width: 50%;">Gold</td> </tr> </tbody> </table>	FINISH		05	Gold
TYPE											
V1	3mm PC Tail										
V2	4.5mm PC Tail										
FINISH											
05	Gold										
<table border="1" style="margin: auto; border-collapse: collapse;"> <thead> <tr style="background-color: #e6f2ff;"> <th>TOTAL NO. OF CONTACTS</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">06, 10, 12, 16, 20, 26, 34, 50</td> </tr> </tbody> </table>		TOTAL NO. OF CONTACTS	06, 10, 12, 16, 20, 26, 34, 50								
TOTAL NO. OF CONTACTS											
06, 10, 12, 16, 20, 26, 34, 50											

All dimensions in mm.

Patent Published