



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
H	-	F		ECR-05-005975	30-JUN-05	BM	JB
		G		ECR-10-019054	15SEP10	DP	MQW
		H		ECR-12-010544	6NOV12	SY	AC

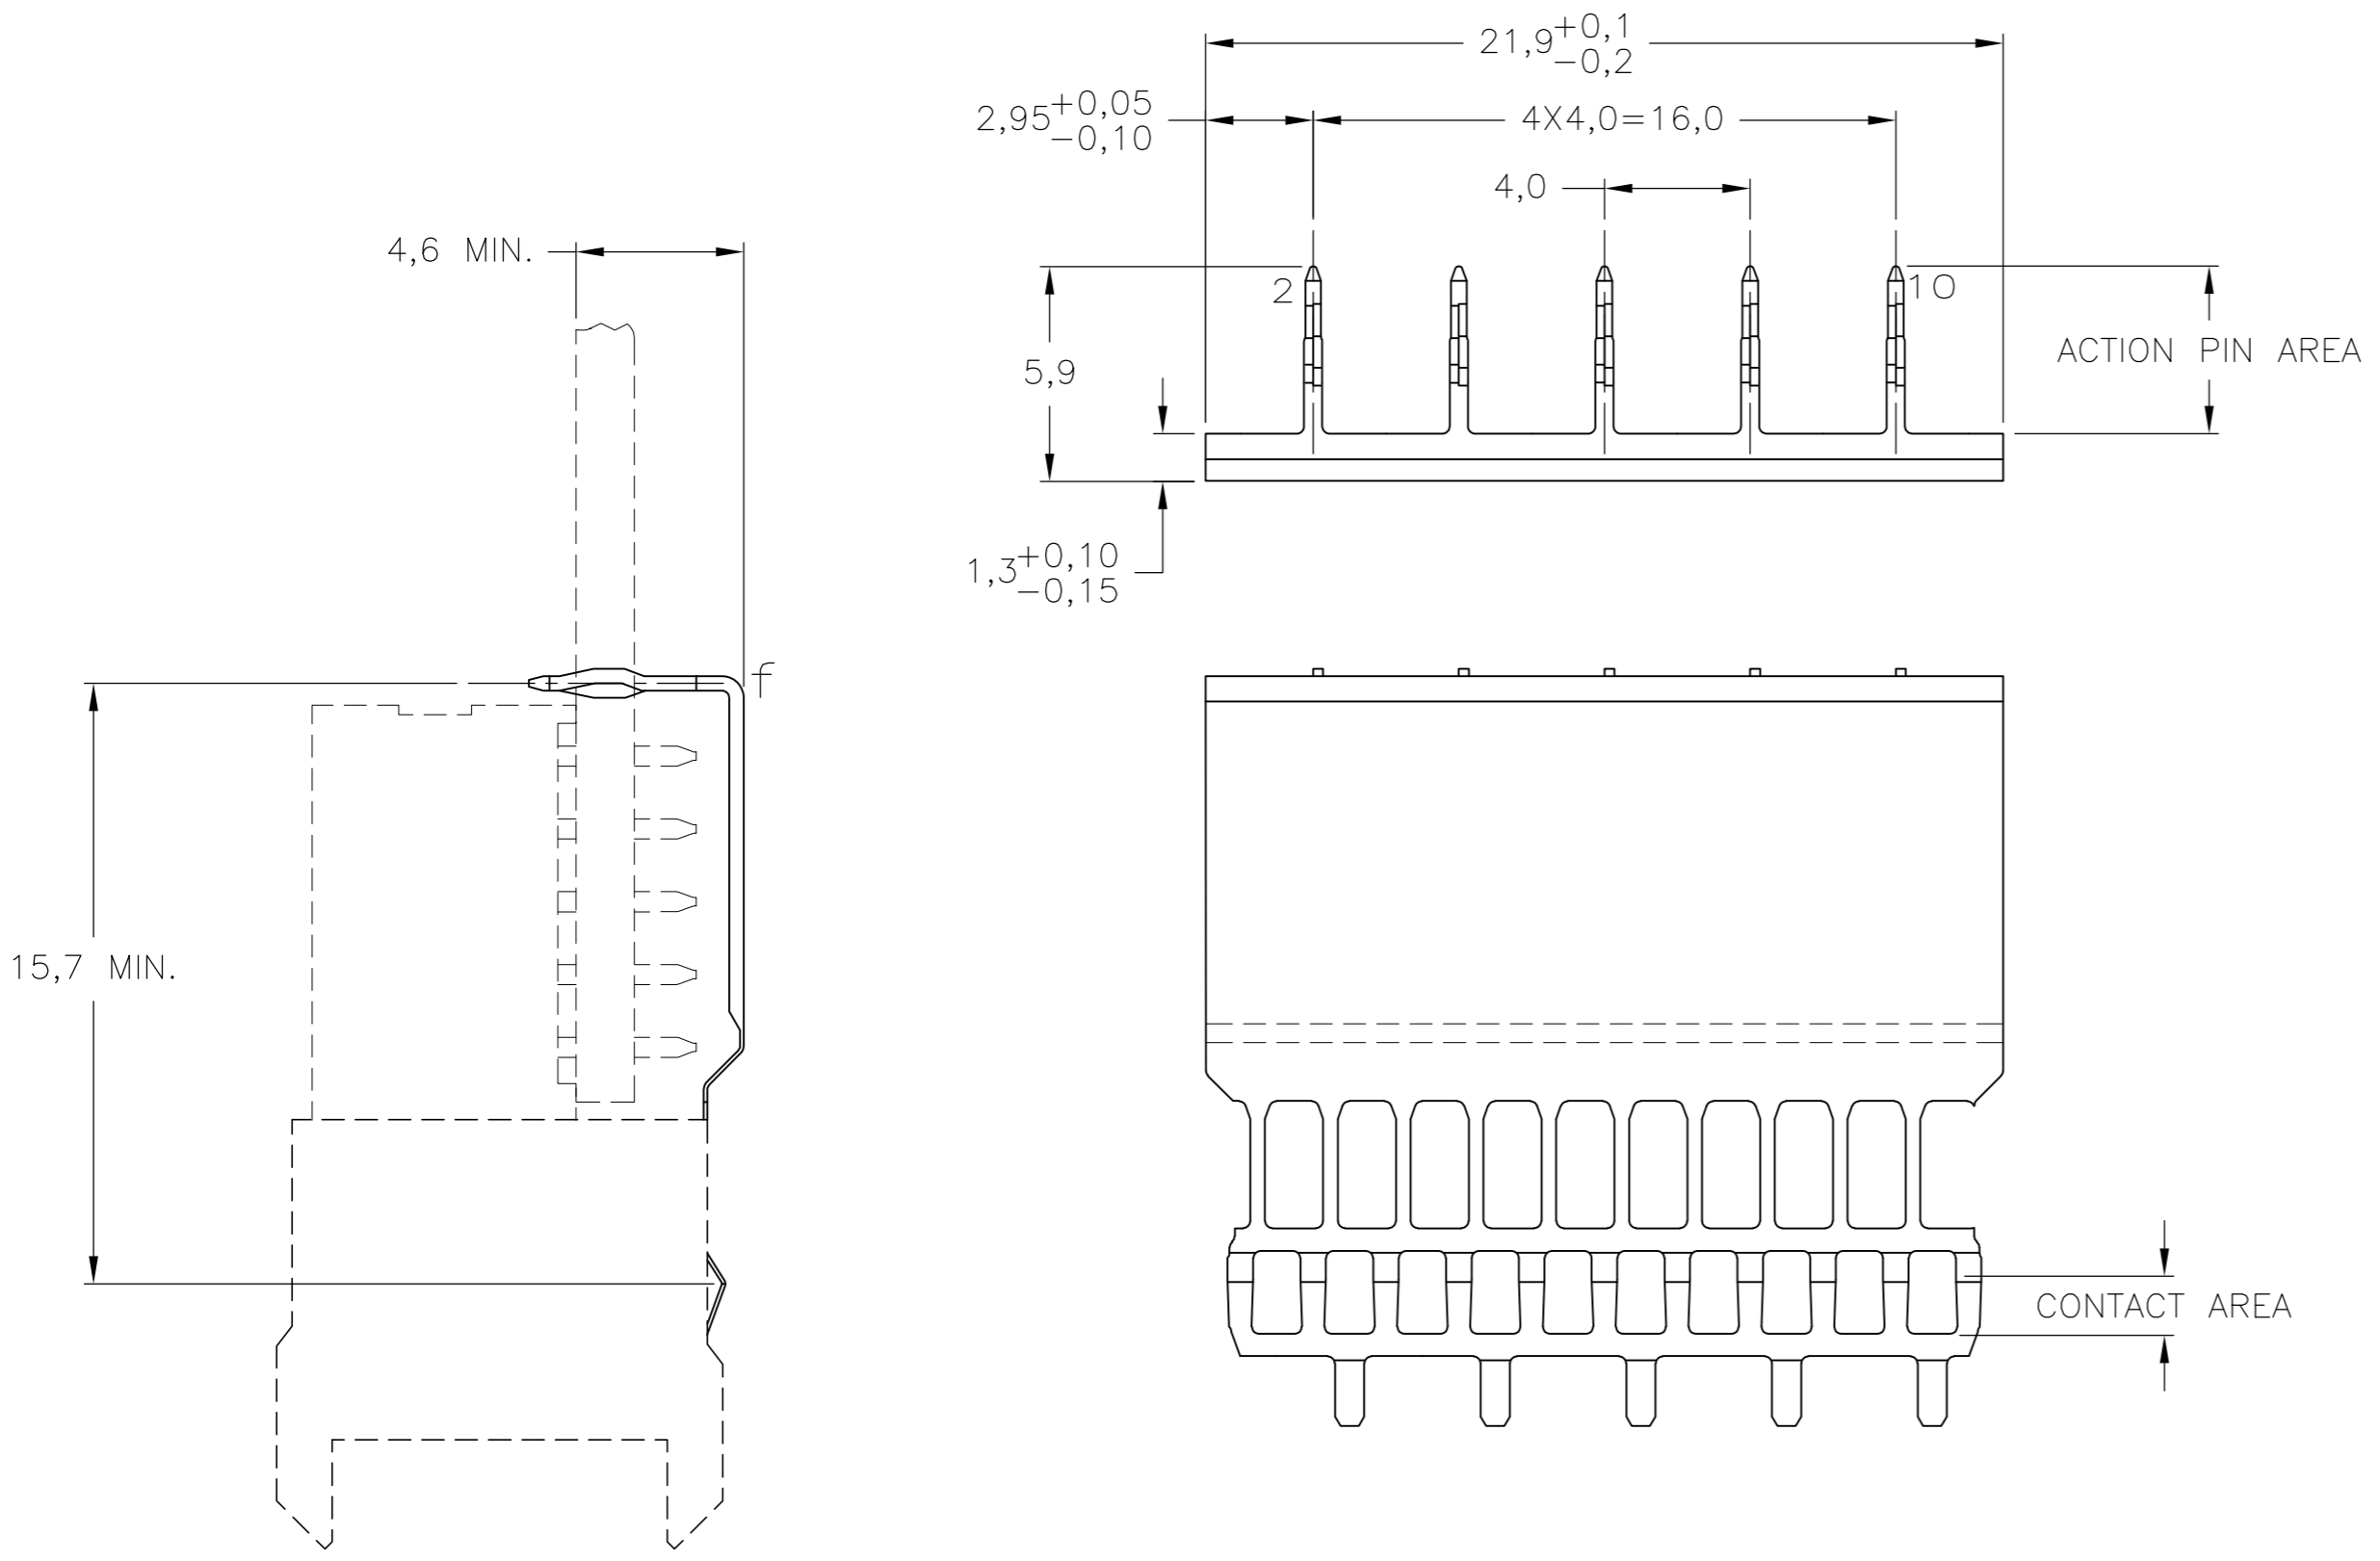

NOTES:

- ⚠️ PLATING:
 CONTACT AREA: 0,76µm Au MIN. OVER 1,27µm Ni MIN.
 ACTION PIN : 0,5µm SnPb MIN.
 REMAINDER : Ni
 - ⚠️ MATERIAL; PHOSPHORBRONZE.
 - ⚠️ ROW "f" 5 PLATED THROUGH HOLES FOR LOWERSHIELD.
 - ⚠️ HOLE PATTERN FOR FEMALE CONNECTOR TYPE C WITH
 UPPERSHIELD, 55+6 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID.
 5 MAX. BOARD THICKNESS 3,5 mm.
 - ⚠️ SHIELDS LUBRICATED WITH BELLCORE APPROVED LUBRICANT.
- TECHNICAL REF: TR-NWT-001217 ISSUE 1, SEPT. 1992.

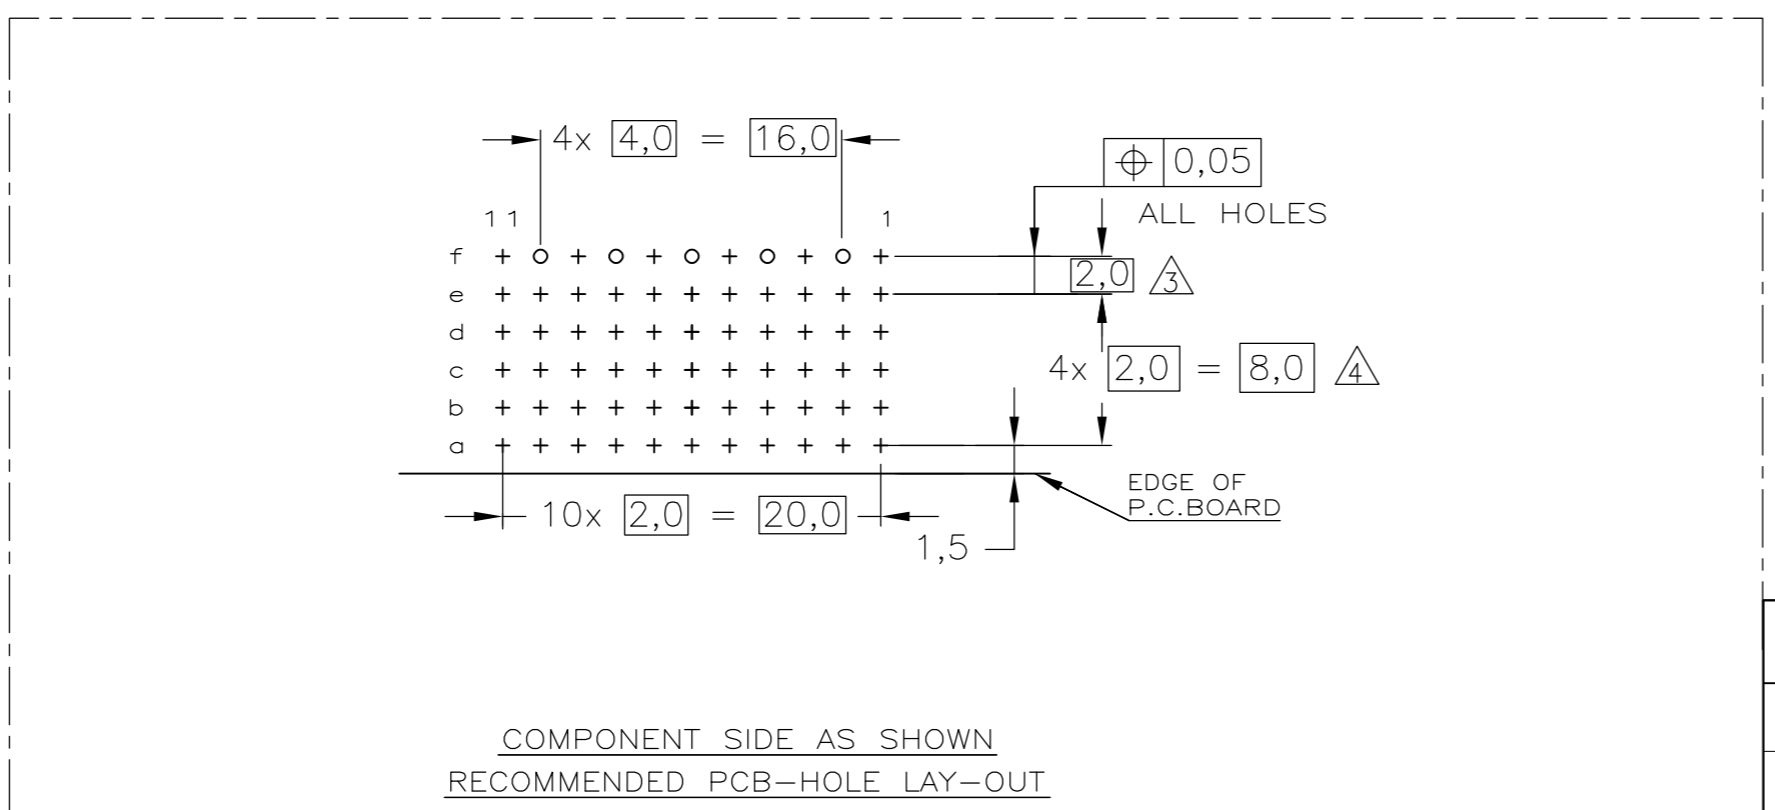

P.C.B. HOLE DIM. ACTION PIN
 FOR DETAILS SEE
 APPLICATION SPECIFICATION

OBSOLETE	⚠️ ⚠️	⚠️	-352112-9-
	⚠️	⚠️	352112-2
	FINISH	MATERIAL	PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. TRUREN 28-11-96	Tyco Electronics Corporation Tyco Electronics Corporation 's-Hertogenbosch, 5222AR-32	
DIMENSIONS: mm		CHK W. v.d.HEIJDEN 28-11-96	NAME Z-PACK 2mm HM GROUND RETURN LOWER SHIELD TYPE C/M	
TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.2		APVD F. v.KONINGSBRUGGE	PRODUCT SPEC 108-19082	SIZE A2
MATERIAL -		FINISH -	APPLICATION SPEC 114-19029	CAGE CODE 00779
		WEIGHT -	DRAWING NO C=352112	RESTRICTED TO -
CUSTOMER DRAWING			SCALE 5:1	SHEET 1 OF 1